



12V/12W DoE VI Fixed Pin Adapter

PSAA12X-120L6-R Series

● 12V/1A ● DoE VI & CoC V5 T2 ● Fixed Pin ● Wire ● Black



The 12V/1A adaptor series is the latest offering from a world leader in charging adapter technology and manufacturing - Pihong Technology. Pihong 12V/1A value adaptor series are designed to work with most 12V powered networking communication devices, such as Router, Switch, Set-Top Box (STB) and other 12V powered devices. Our 12V value adaptor series conforms to most of the industry standards and meets DoE level 6 energy efficiency requirements, we ensure our products meet or exceed all the industry performance and safety requirements.

Features :

Efficiency	DoE Level VI & CoC V5 Tier 2 (83.2%)
Power Saving	0.075W@ no load, 115Vac/60Hz & 230Vac/50Hz
Protection	OVP (20V), OCP (2A), SCP
Turn-On Delay Time	<3 sec at min/max AC power on
Hold-up Time	>10mS @ max load, 120Vac/60Hz
Rise Time	<100mS @ max load, 120Vac/60Hz
Fall Time	<50mS @ max load, 120Vac/60Hz
Dynamic Response	±10% max, @ 90~264Vac, 25°C
	Rise rate = 0.5A/us, Fall rate = 0.5A/us
	(Load transient: 20% → 80% → 20%)
	T _{high} = 1mS, T _{low} = 1mS
Isolation	Primary to Secondary 3000Vac, 10mA for 1min.
Insulation	Primary to Secondary >10MΩ 500Vdc
Dimension	US : 71.2*46*34 (mm)

Electrical Specifications :

Input Voltage	100~240Vac (90~264Vac min/max)
Frequency	50/60Hz Nom (47~63Hz min/max)
Input Current	0.5A (RMS) max @ 100Vac
Output Voltage	12V,
Output Current	1A
Maximum Output Power	12W continuous
Output Ripple & Noise	240mV (pk-pk) @25°C and 115 & 230Vac
Line Regulation	±5%
Leakage Current	<0.25mA max @ 240Vac
Inrush Current	<40A max @ 115Vac/60Hz, 25°C, Max load
	<60A max @ 230Vac/50Hz, 25°C, Max load
Capacitive Load	3300uF @ Von=2V (CC mode), 100~240Vac

Environmental Specifications :

Operating Temperature	0°C ~ +40°C
Storage Temperature	-40°C ~ +85°C
Humidity	0% ~ 95%
E Cap Life	10,000 Hrs. min @ 100Vac, 80% load, 40°C
MTBF	400K Hrs min. @100Vac, Full load, 40°C
	(Telcordia SR-332, issue2)

Safety and Compliance :

UL60950-1 approved
EMI: EN55022 class B, FCC class B
ESD : EN50082-1 : EN61000-4-2, Level 4
ESD : Air ±15KV, Contact: ±8KV, Criteria B
Surge immunity: EN61000-4-5, Level 3 (1KV), Criteria B
RS: EN61000-4-3, Criteria A
EFT/B: EN61000-4-4, Criteria B
CS: EN61000-4-6, Criteria A
PFMF: EN61000-4-8, Criteria A
Voltage Dip: EN61000-4-11, Criteria B

Note:

- Measurements shall be made with an oscilloscope with 20MHz bandwidth. Output shall be bypassed at a connector with a 0.1uF ceramic capacitor and a 10uF low ESR electrolytic capacitor.
- Efficiency: Measure efficiency at 100%, 75%, 50%, 25% load after burn-in 30 minutes at 100% load, then compute the arithmetic average of these 4 values.

*X=A, C, E, K, S A=USA C=China E=EU K=UK S=AU




12V/12W DoE VI Fixed Pin Adapter

PSAA12X-120L6-R Series

- 12V/1A
- DoE VI & CoC V5 T2
- Fixed Pin
- Wire
- Black



Dimensions: mm

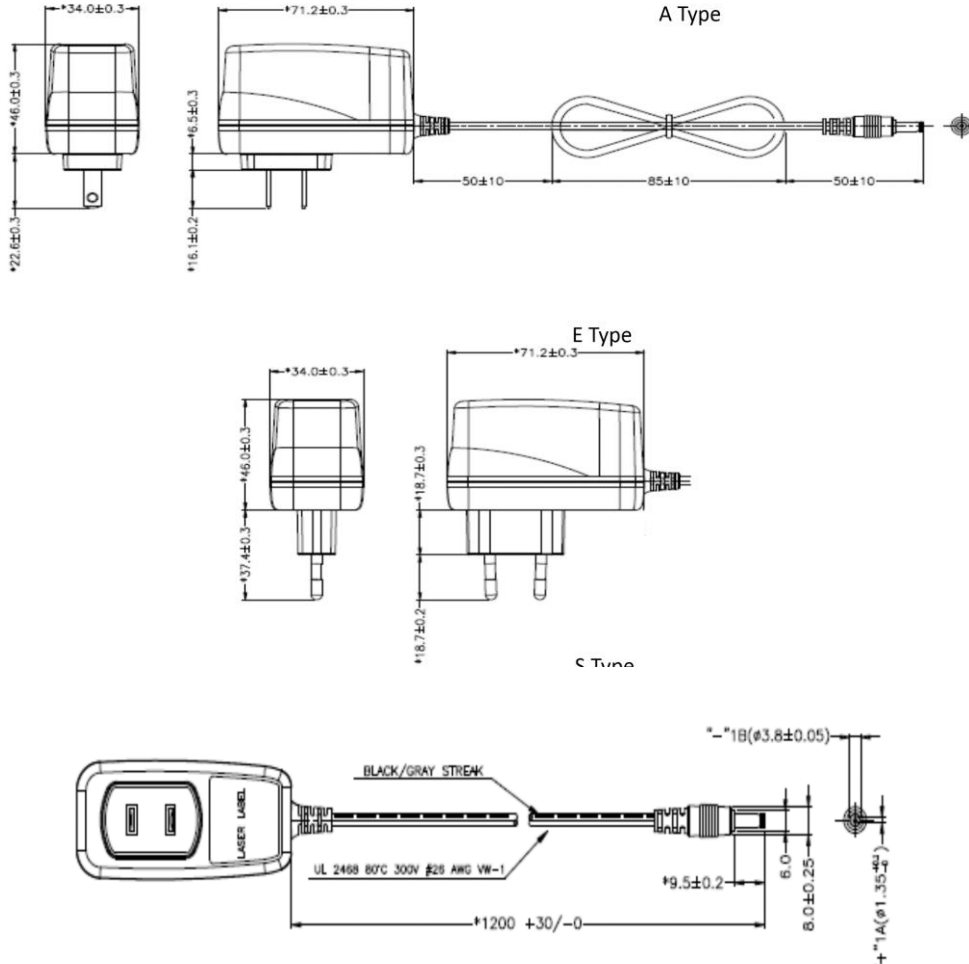

Model Selections				
Model Number	Plug Type	Output Current (A $\pm 5\%$)	Output Voltage (Vdc)	Max. Output Power (W)
PSAA12A-120L6-R	US	1	12	12
PSAA12E-120L6-R	EU	1	12	12

Headquarters

No. 568, Fusing 3rd Rd.,
Gueishan District, Taoyuan City,
333, Taiwan, R.O.C.
Tel: +886-3-3277288
Fax: +886-3-3185999
phsales@phihong.com.tw
www.phihong.com.tw

Phihong USA

47800 Fremont Blvd.
Fremont, CA 94538, USA
Tel: +1-510-445-0100
Fax: +1-510-445-1678
usasales@phihongusa.com
www.phihong.com

Phihong China

Science & Technology Rd.,
Silver Lake Industrial Area
Qingxi Town, Dong Guan City,
Guang Dong (523648), China
Tel: +86-769-87319026
Fax: +86-769-87317106
phsales@phihong.com.tw

Phihong Japan

〒135-0016 東京都江東区東陽
3丁目23番24号 VORT 東陽町
ビル5階
TEL : +81-3-5677-1678
FAX : +81-3-5634-5255
phsales@phihong.com.tw
www.phihong.co.jp

Phihong Europe

Wattstraat 50, 2171 TR
Sassenheim, The Netherlands
Tel: +31-(0)-252-225910
Fax: +31-(0)-252-218764
sales@phihongeu.com
www.phihong-lighting.com



PHIHONG TECHNOLOGY CO., LTD.

- +886-3-3277288
- www.phihong.com.tw
- phsales@phihong.com.tw