

Features

- Special design screw terminal for field connection
- Class II protection against electric shock from direct and indirect contact SELV output
- Open circuit, short circuit, over load and over temperature protection
- Auto restart after fault conditions removal
- No load power consumption $\leq 0.3W$



Specification

INPUT

Rated Input voltage:	220-240Vac
Input frequency:	50/60Hz (power factor measured at AC230V and full load)
Input Current:	0.2A
Power factor:	$\lambda > 0.9C$
AC Inlet :	Screw terminal

OUTPUT

Constant output voltage:	24Vdc
Output current:	0 ~ 1.25A
Output power:	30W
DC Outlet :	Screw terminal


STANDARDS

EN61347-1 EN61347-2-13 EN 55015 EN6100-3-2 EN61000-3-3 EN61547 EN62493



Mechanical Specification

Operating Temperature (ta):	-20°C ~ +45°C
Case temperature (tc):	+80°C
Case Size:	151.2L x 45W x 27H mm
Weight:	138g

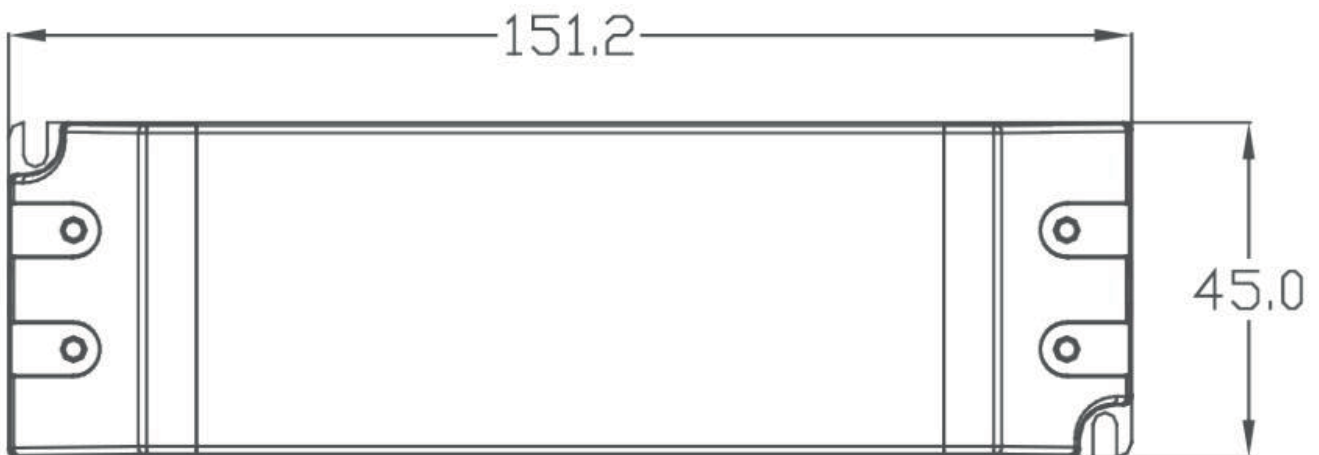

For more information please contact us.

Berger Stromversorgungen GmbH & Co. KG

Bannmatten 10
77855 Achern
Germany

Tel.: +49(0)7841-67304-0
Fax: +49 (0)7841-67304-29

info@berger-stromversorgungen.de
www.berger-stromversorgungen.de

Version 01.03